

T8 Luxline Plus Special Length

F15W/T8/840

0000567

Range features



PRODUCT OVERVIEW

Light colour	840 Cool White
Technology	Fluorescent
Ordering number	0000567
Energy class	B
Lamp shape	Tubular
Lamp finish	Coated
Dimmable	Yes
Cap/Base	G13
Type	T8 Luxline Plus Special Length
EAN code	5410288005676
CRI (Ra)	85
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	950
Efficacy (Rated) 100h (lm/W)	63
Watt (Nominal) (W)	15
Voltage (V)	55

T8 Luxline Plus Special Length

F15W/T8/840

0000567

DATA TABLE

General data

Technology	Fluorescent
Ordering number	0000567
Average life (Nominal) (h)	20000
Energy class	B
Lamp shape	Tubular
Lamp finish	Coated
Dimmable	Yes
Cap/Base	G13
Type	T8 Luxline Plus Special Length
EAN code	5410288005676
E-number FI	4940227
E-number SE	8356574
Product name	F15W/T8/840
Lamp mercury content (mg)	2.8
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Sales pack quantity	25
Rated survival factor at 2000 h 50Hz	0.99
Rated survival factor at 4000 h 50Hz	0.98
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.94
Rated survival factor at 12000 h 50Hz	0.92
Rated survival factor at 16000 h 50Hz	0.8
Rated survival factor at 20000 h 50Hz	0.5

T8 Luxline Plus Special Length

F15W/T8/840

0000567

Optical data

Light colour	840 Cool White
CRI (Ra)	85
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	950
Luminous flux (Nominal) (lm)	950
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h 50Hz	0.96
Rated lumen maint. factor at 4000 h 50Hz	0.94
Rated lumen maint. factor at 6000 h 50Hz	0.92
Rated lumen maint. factor at 8000 h 50Hz	0.91
Rated lumen maint. factor at 12000 h 50Hz	0.9
Rated lumen maint. factor at 16000 h 50Hz	0.89
Rated lumen maint. factor at 20000 h 50Hz	0.87

Electrical data

kWh per 1000 hours burning time	19
Efficacy (Rated) 100h (lm/W)	63
Watt (Rated) - High frequency (W)	13.5
Watt (Nominal) (W)	15
Watt (Rated) (W)	15
Voltage (V)	55
Current (A)	0.31

Physical data


Weight (kg)	0.06
Length base to base (mm) - A	437.4
Length base to pin Min-Max - B	442.1-444.5
Max overall length (mm)	451.6
Lamp Diameter (mm) - D	26
Single package dimensions (L x W x H)	45.20 x 2.90 x 2.80
Single package volume (dm3)	0.367
Single product net weight (kg)	0.06
Single product gross weight (kg)	0.07
Single packaging weight (kg)	0.01
Outer package dimensions (L x W x H)	48.00 x 15.50 x 15.00
Outer package net weight (kg)	1.58
Outer package gross weight (kg)	1.93
Outer package volume (dm3)	11.160
Outer packaging weight (kg)	0.36
Units per outer package	25

T8 Luxline Plus Special Length


F15W/T8/840

0000567

PHOTOMETRY

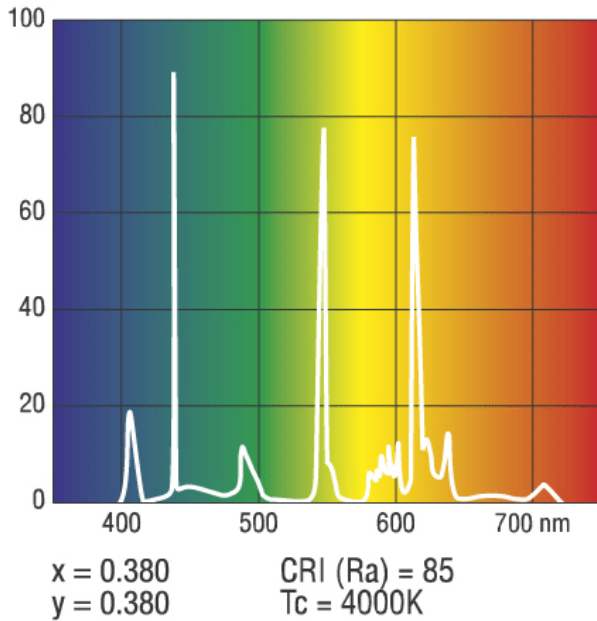

TECHNICAL DRAWINGS

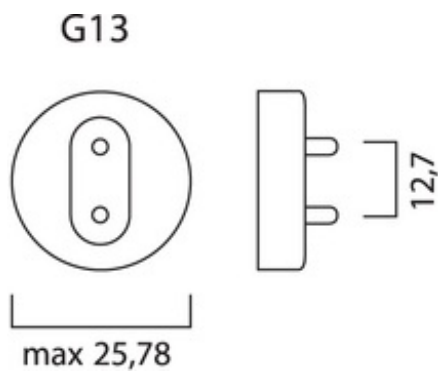

ENERGY LABEL

